



PACCAR MX-13

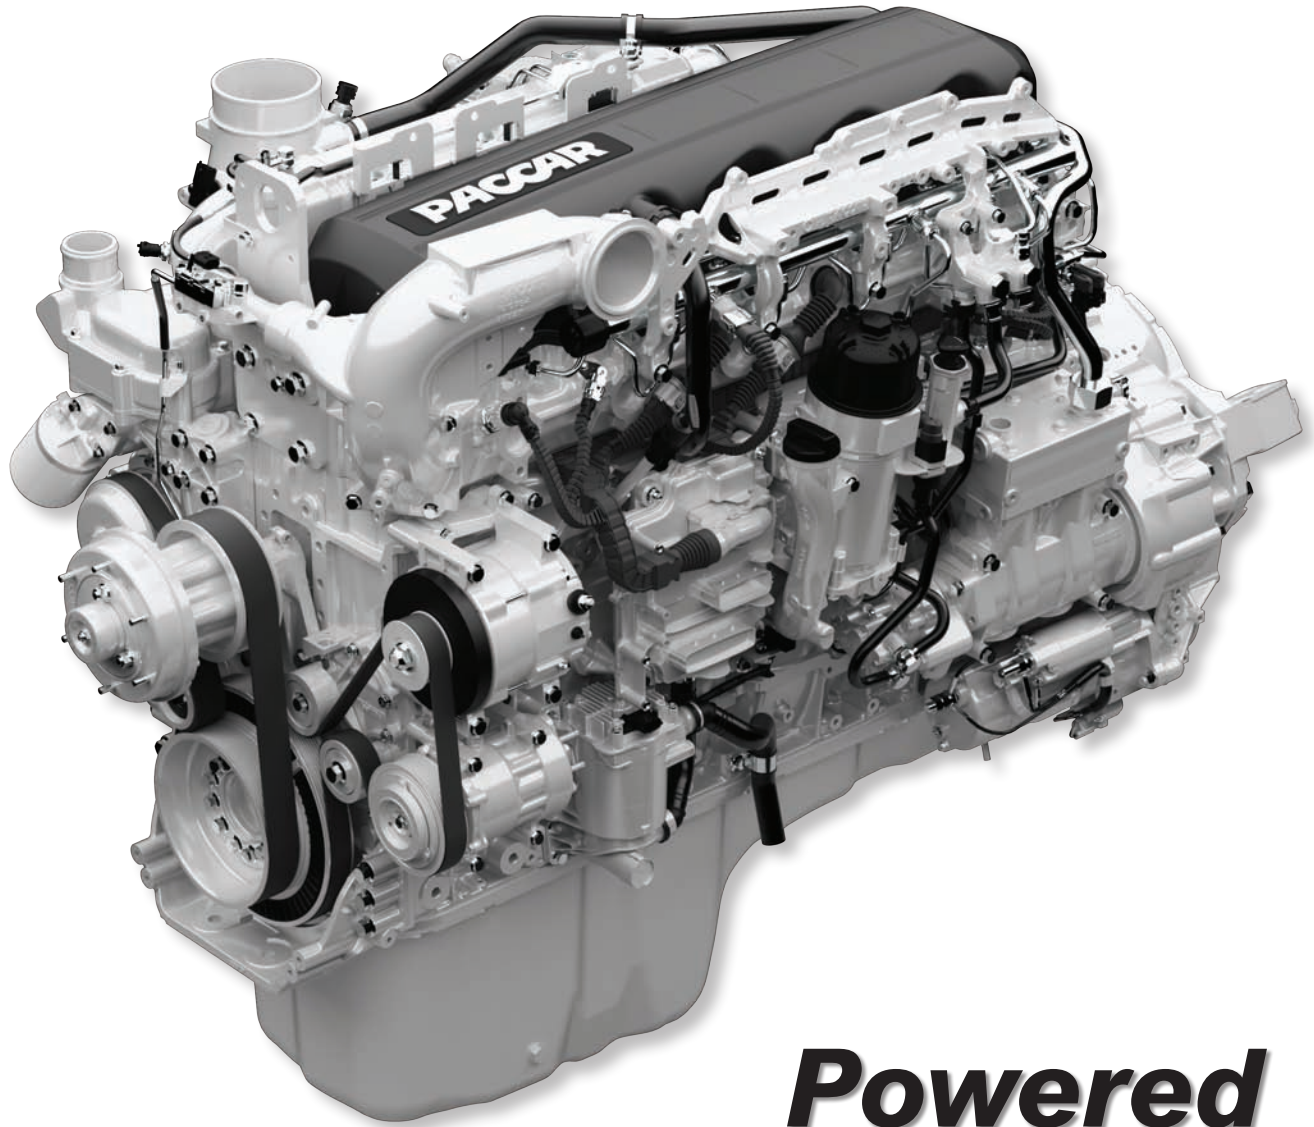

***Powered
By
Quality***

PACCAR MX-13

Powered By Quality

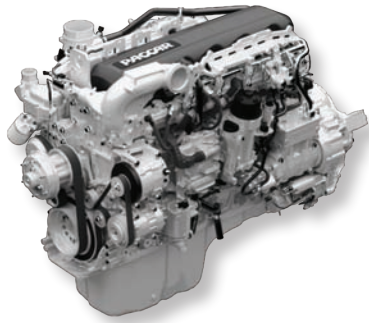

RATINGS

ENGINE HORSEPOWER	PEAK TORQUE LB-FT @ RPM	
380	1,450 @ 1,000	—
405	1,450 @ 1,000	—
405	1,550/1,750 @ 1,000*	—
430	1,550 @ 1,000	—
430	1,550/1,750 @ 1,000*	—
455	1,650 @ 1,000	—
455	1,550/1,750 @ 1,000*	—
485	1,650 @ 1,000	—
500	1,850 @ 1,100	—

*Multi Torque Rating

SPECIFICATIONS


CONFIGURATION	INLINE 6-CYLINDER
BORE X STROKE (MM)	130 x 162
DISPLACEMENT	12.9 LITERS
DRY WEIGHT	2,600 LBS.
OIL SYSTEM CAPACITY	42 U.S. QUARTS
HORSEPOWER	380-500 HP
PEAK TORQUE	1,450-1,850 LB.-FT.
GOVERNED SPEED	2,200 RPM
CLUTCH ENGAGEMENT TORQUE ¹	973 LB.-FT. @ 800 RPM
B10 DESIGN LIFE	1,000,000 MILES/ 1,600,000 KM
BASE WARRANTY ⁸	2 YEARS/250,000 MILES/400,000 KM

MAINTENANCE INTERVALS



MAINTENANCE ITEM	MILES	KILOMETERS
FUEL FILTER - VOCATIONAL DUTY	25,000	40,000
- STANDARD DUTY	40,000	64,000
OIL AND FILTER - VOCATIONAL DUTY	25,000	40,000
- STD. DUTY > 20% IDLE TIME	40,000	64,000
- STD. DUTY < 20% IDLE TIME	60,000	96,000
COOLANT FILTER (IF EQUIPPED)	160,000	256,000
DEF FILTER	300,000	480,000

Note: Equipment and specifications shown in this brochure are subject to change without notice. Consult with your PACCAR Engine dealer at time of ordering for standard and optional equipment.

HORSEPOWER

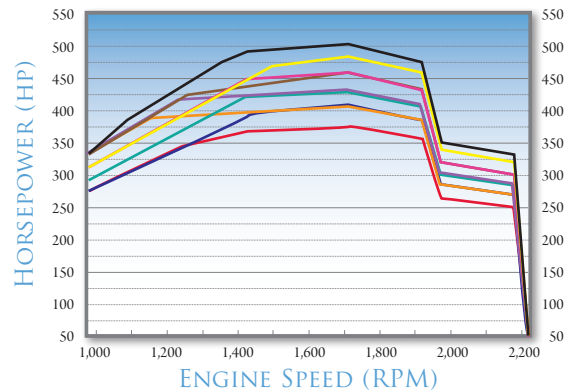

TORQUE

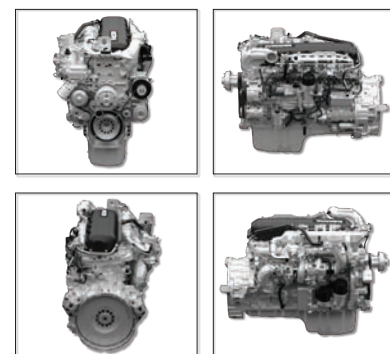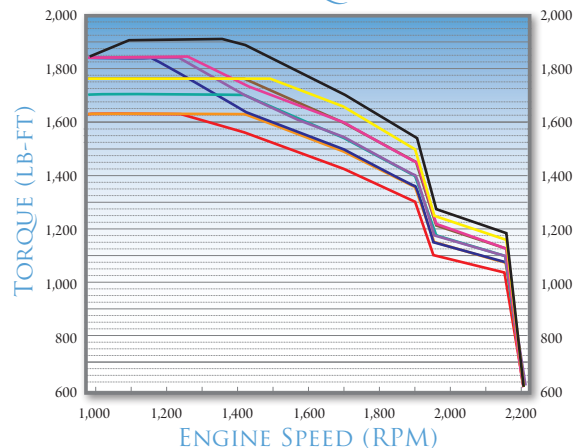

KENWORTH OF SOUTH FLORIDA

(954) 523-5484 Fort Lauderdale
 (772) 409-1800 Fort Pierce
 (305) 808-3000 Miami
 (561) 882-9775 Riviera Beach

www.kenworthsf.com